


RICHARDSONS
MAKING WORKSPACE WORK

6 Collingwood Court
Riverside Park
Middlesbrough TS2 1RP


Tel: 01642 242228 | Fax: 01642 242259
www.richardsonsuk.co.uk | sales@richardsonsuk.co.uk

Mezz Pro

MezzPro - Platform A (QXXXXXX)

Product Specification

Operation	Lifting and lowering GOODS ONLY (no passengers)
Maximum Working Load	500 kg
Number of Stops	2 (Ground + 1)
Travel	Ground to First Floor - 3500 mm First to Second Floor - 0 mm
Usable Platform Size	1300 mm (w) x 1300 mm (d)
Platform Guarding	900 mm high barriers to suit loading direction - No gates
Lift Speed	0.2 m/s
Power Supply Required	415 V, 2.2 kW, Three phase and Neutral supply terminated in a double pole isolator at lower level
Controls	Hold to run push button controls (12 v), with emergency stop, adjacent to the gates at each level
Drive Type	Suspension chains with hydraulic motor drive (Twin Mast)
Power Pack	Mounted remotely to suit application on a floor mounted stand
Loading Configuration	Load Through
Closed Height	50 mm platform thickness
Ramp	500mm fixed ramp provided
Lift Pit	Floor mounted, no pit required
External Shaft Footprint	2160 mm (w) x 1580 mm (d)
Shaft Enclosure	Self supporting steel frame, 1" x 1" mesh filled
Door Type	Electrically Interlocked 2000 mm high double gates
Lift & Guard Colour	Black spray finish
Documentation	CE Mark and Declaration of Conformity Operation and Maintenance Manual issue on completion LOLER Report of Thorough Examination and Test issued on commissioning
Training	Operator training carried out on completion
Duty Cycles	Based on 10 cycles per hour on a single shift basis
Warranty	12 months parts and labour for customers in the U.K. mainland only. Others are on a parts only basis.

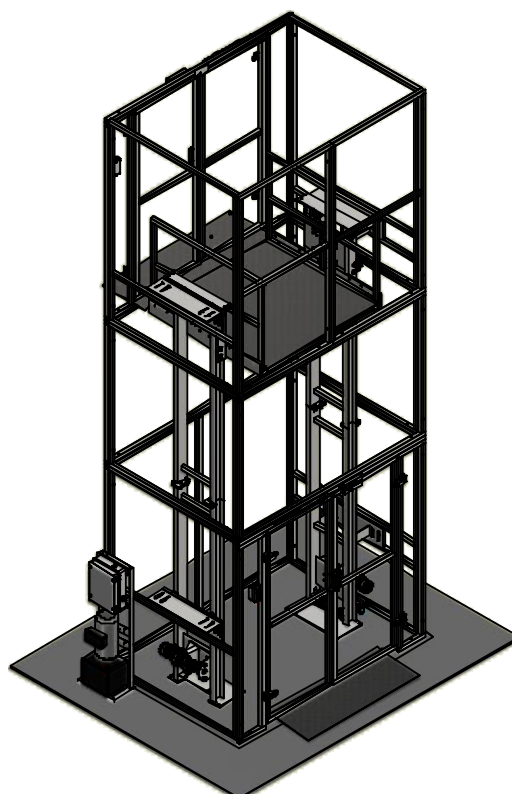

CAD version of your Lift